

26

kW

POWERPROTECT™

Standby Generators



BRIGGS & STRATTON
ENERGY SOLUTIONS



More power than ever before. The 26kW¹ is the generator you pick when your whole home needs power and you need peace of mind. This first of its kind generator is powered with a commercial-grade Vanguard® engine for reliable, clean power and is designed to keep your home and family running no matter what is causing an outage.

FEATURES



Highest Rated Power Output on Natural Gas³

Engineered with NGMax for superior power and performance with convenient hookups for both liquid propane and natural gas.



Most Comprehensive Warranty in the Industry²

No out of pocket costs; labor, parts, service all included. That's up to a \$849 value!



Industry's Most Powerful

Worry-free backup power with the industry's most powerful air-cooled generator.



Engineered and Assembled in USA

Briggs & Stratton generators are designed and assembled in the USA.³



Quiet Weekly Test Mode

70% quieter during weekly test mode.⁴



Superior Motor Starting

Best motor starting in the industry³ to ensure smooth operation of your large appliances during startup. Up to 68% more power³ than the competition.



Power Management System (optional)

Customizable to your home's power needs, the Symphony® Choice Power Management system offers prioritized whole house power with a more affordable standby generator.



Corrosion Protection

Reinforced, corrosion-resistant aluminum enclosures and bases with Dura-Zen™ coating for a long-lasting attractive appearance.

26

kW

POWERPROTECT™

Standby Generators



BRIGGS & STRATTON
ENERGY SOLUTIONS

FEATURES



Eco-Cise™ Weekly Test Mode

Our short 16-second weekly test mode ensures your generator is in top operating condition while reducing noise and fuel consumption.



Vanguard® Commercial-Grade Engine

Powerful engine built in the USA for commercial applications providing power for electronics.



In-House Call Support

Enjoy direct access to our US-based Briggs & Stratton energy experts whenever you need.



Flexible Installation & Maintenance

Approved for installation as close as 18" to a building⁵ with easy toolless panel removal for serviceability and maintenance.



Suitable for Off-Grid use or Demand Response Programs

Certified for non-emergency use, partner with your utility company's demand response program to receive incentives for helping reduce the overall load on the power grid.



Engineered with

NGMax™

for superior power and performance



Learn More

energy.briggsandstratton.com/powerprotect

When choosing a standby generator, check the specifications closely. **Only Briggs & Stratton PowerProtect generators feature NGMax™ technology, delivering up to 12% more power on natural gas than the competition.** For homes with natural gas, Briggs & Stratton is the ideal choice.

26

kW

POWERPROTECT
Standby Generators



BRIGGS & STRATTON
ENERGY SOLUTIONS

| Generator Set Rating | |
|--|-------------|
| Model Name | PP26 |
| Model Number | 040806 |
| Running Power (Liquid Propane/Natural Gas) kW ¹ | 26 / 24 |
| Running Amperage (Liquid Propane/Natural Gas) Amps | 108.3 / 100 |
| Voltage | 120 / 240 |
| Circuit Breaker Amps | 125 |



| Fuel Consumption ⁷ | |
|-------------------------------|-----------------------------|
| No Load (BTU/hr) | NG - 122,000 / LP - 123,000 |
| Half Load (BTU/hr) | NG - 206,000 / LP - 235,000 |
| Full Load (BTU/hr) | NG - 323,000 / LP - 427,000 |

| Product Dimensions | |
|-------------------------------|--|
| Overall Dimensions (in / mm) | 46.5 x 26.8 x 28.4 / 1181 x 681 x 721 |
| Assembled Weight (lbs / kg) | 540 / 245 |
| Packaged Dimensions (in / mm) | 48.8 x 30.5 x 50.5 / 1240 x 775 x 1283 |
| Packaged Weight (lbs / kg) | 625 / 285 |

| Engine | |
|-----------------------------------|-----------------------|
| Manufacturer | Vanguard [®] |
| Frequency Regulation Steady State | +/-1.0% |

| Sound Rating ⁸ | |
|-------------------------------------|--------|
| Low Idle Mode Sound | 63 dBA |
| Normal Operating Sound ⁸ | 65 dBA |

| Available Accessories | |
|-----------------------|------|
| Engine Oil Heater | 6840 |
| Maintenance Kit | 6872 |
| Fuel Regulator Warmer | 6845 |
| Surge Protector | 6631 |
| UPS | 6581 |

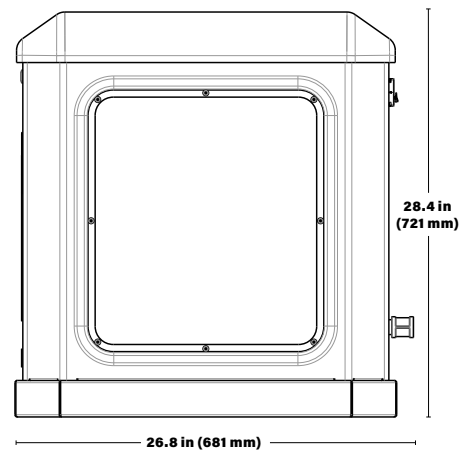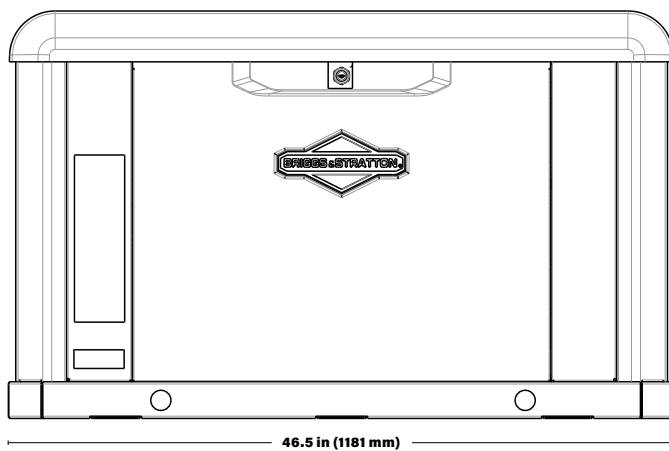

26
kW

POWERPROTECT™
Standby Generators



¹ This generator is rated in accordance with UL (Underwriters Laboratories) 2200 (stationary engine generator assemblies) and CSA (Canadian Standards Association) standard C22.2 No. 100-14 (motor and generators).

² See operator's manual or energy.briggsandstratton.com for complete warranty details.

³ 50% smaller footprint than competitors

⁴ Of global and U.S. parts

⁵ The installation manual contains specific instructions related to generator placement in addition to NFPA 37, including the requirement that carbon monoxide detectors be installed and maintained in your home or business.

⁶ Fuel consumption rates are estimated based on normal operating conditions. Generator operation may be greatly affected by elevation and the cycling operation of multiple electrical appliances – fuel flow rates may vary depending on these factors.

⁷ Per ISO 3744. Sound level measurement at other locations around generator may differ depending on installation, based on lowest microphone at 7m. Normal operation based on average household usage.

⁸ In its named class.

Briggs & Stratton has a policy of continuous product improvement and reserves the right to modify its specifications at any time and without prior notice.

This standby generator is not for Prime Power applications.

Please visit energy.briggsandstratton.com for the latest information.

BS1299 - 4-18-24

BRIGGS & STRATTON
POST OFFICE BOX 702
MILWAUKEE, WI 53201 USA

Copyright © 2024 Briggs & Stratton. All rights reserved.